

Accessories for connecting pressure measurement equipment to air-handling systems

Doc.no: Md-1249gb_070508
Replaces:

ACCESSORIES

✓ VR-DR, Pressure connecting kit




Complete kit for connecting of transmitter or controller to duct when measuring a differential pressure

Contains:

- 2 pcs Duct measuring tap VM-3 with fitting
- 6 pcs Clips with screw for fastening the tube
- 6 m HT-plastic tube 8/6 mm
- 1 pc Label for pressure tube

✓ 2-TK/M, Block valve

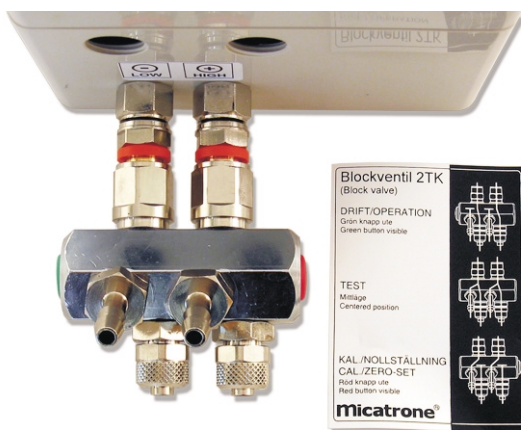

Block valve for easy zero-setting and pressure measurement control hose adapter for transmitters and controllers. The block valve can be delivered attached to the transmitter as in picture above or fitted with a wall mounting bracket.

✓ VM-2, Static pressure measuring tap for indoor use



Measuring tap for measurement of pressure in rooms or other indoor chamber where temperature is above the freezing point.

The kit includes measuring tap for both surface mounting and for recessed mounting in a standard 60mm circular connection box. The kit contains:


- 1 pc Connection box for surface mounting
- 1 pc Cover plate for recessed mounting
- 1 pc Measuring tap
- 1 pc Straight fitting 8/6
- 1 pc Angled fitting 8/6, swivel-type
- 1 pc R1/8" extension fitting
- 2 pcs Mounting screws

✓ VM-2/SS, Static pressure measuring tap in stain-less steel



Same as above standing measuring tap but only for recessed mounting in standard 60 mm connection box. Flexible connection for 8/6 mm plastic tube.

✓ **VM-1, Bulkhead connection**

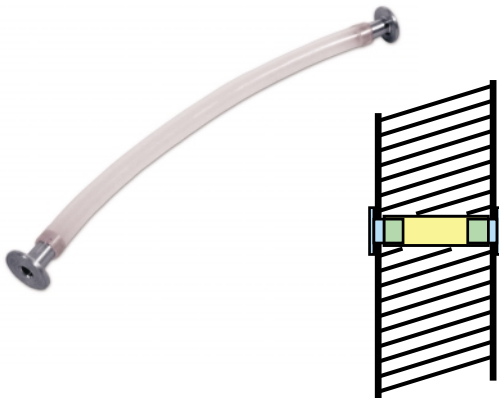

The bulkhead connection should be used when mounting a surface mounted measuring tap, type VM-3, on isolated ducts with double walls.

The VM-1 kit contains:

- 10 pcs Aluminium push-in tube adapters
- 5 pcs Tube 8/6 mm, length 150 mm

✓ **VM-3, Measuring tap 8/6 mm**



Measuring tap for surface mounting with plastic tube 8/6 mm swivel fitting, mounting screws and gasket.

✓ **PVC Hose-kit 60-8044**



Simple hose-kit for connecting of pressure and flow transmitters type **Micaflex PF-M** and **PMF** to ducts including 2 pcs plastic hose adapters with mounting screw and 2 meter flexible PVC hose 4/7 mm.

✓ **HT-plastic tube PE and PA**



Pressure tube in polyethen (PE) and polyamid (PA) for a secure and tight connection to pressure transmitters and controllers. PE-tube white or yellow for a max temperature of 60°C and PA-tube in blue or black for max.temp of 100°C.

The HT-tube can be ordered in rolls of 50m (8/6) or rolls of 100m (6/4) and per meter.

✓ **VM-5, Water trap**



VM-5 is used when there is a risk that condensed water is collected in the pressure tube. This can occur when the tube is passing different temperature zones. VM-5 is mounted at the lowest position of the pressure tube between the measuring outlet and transmitter or controller.

✓ **Seperate fittings 8/6 for plastic HT-tube**



- | | |
|------------------|------------------------|
| 60-9030-1 | Connector Straight 8/6 |
| 60-9030-2 | Connector Elbow 8/6 |
| 60-9030-3 | Connector T-type 8/6 |